

Specifications:

AAMA/WDMA/CSA/IS101/A440, CSA-A440S1 (Non-Impact)
TAS 201, 202, 203 ([FL-16925](#) HVHZ)
ASTM 1886e/1996e ([FL-16925](#) Impact Non-HVHZ)

Frame:

- Frames GTF – Outside Glazing
- Multi-Lite Fixed Units with TDL/Mullions
- Intersecting TDL/Mullion bars (**Non Impact**)
- Unlimited opening width (maximum centerline width 60" c/l x frame height 120")
- No Corner Configurations
- Block or Nail Fin Frame

Single Fixed Units: ([FL-16925.1](#),[FL-16925.6](#))

- 60" x 120" - DP +60/-60 - Water: 15 psf
- 50" x 144" - DP +65/-65 - Water: 15 psf
- 72" x 144" - DP +55/-55 - Water: 15 psf

Multi Lite Fixed Units: Vertical Glass Stops to have exposed fasteners on HVHZ

TDL Frames:

- 42" x 180" (maximum lite height 83") DP +65/-65 ([FL-16925.5](#))
- Unlimited Frame Width x 96" (maximum 42" c/l) DP +65/-65 – Water: 15lbs ([FL-16925.2](#))
- 96" x 120" (O/O/O) (maximum lite height 42" c/l) DP +65/-65 – Water: 15lbs ([FL-16925.3](#))

Intersecting TDL Frames:

- 120" x 120" (OO/OO) DP +50/-50 – Water: 12lbs (**Non Impact**)

Jamb Mullied Frames

- Unlimited Frame Width x 120" (maximum 60" c/l) DP +55/-60 – Water: 15lbs ([FL-16925.4](#))

Glazing Options:


HVHZ / Impact Non-HVHZ:

- G1. 9/16": 6mm/.090SGP/6mm-R
- G2. 1.25" IG: 5mm-T/space/Lami(5mm/.090SGP/5mm)-R or HS
- G3. 1.25" IG: 5mm-T/space/Lami(3mm/.090SGP /3mm)-R
- G4. 1.25" IG: Lami(3mm/.090SGP /3mm-)/space/6mm-T
- G5. 1.25" IG: 6mm-T/space/Lami(3mm/.090 SGP/3mm)-R
- G6. 1.25" IG: 6mm-T/space/Lami(5mm/.090SGP/5mm)-R
- G7. 9/16": 6mm/.090SGP/6mm-HS (Wet Glazed)

Non-Impact:

- 1" IG: 6mm-R/space/6mm-R
- 1" IG: 5mm-R/space/5mm-R (DP +50/-50)


Sample Illustrations: Single Fixed Units

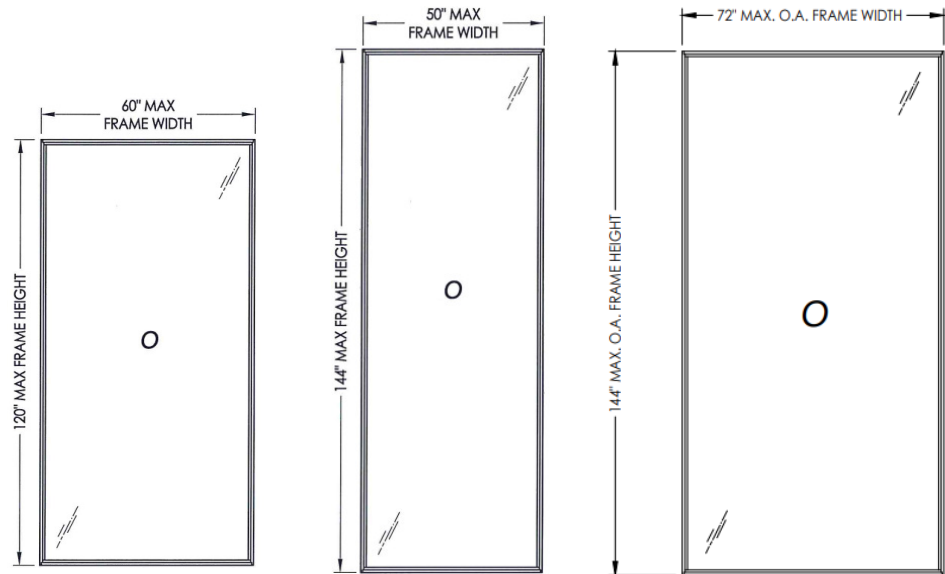

	OUTSIDE GLAZED	OUTSIDE GLAZED	OUTSIDE GLAZED
MAX FRAME DIMENSIONS	60.0" X 120.0"	50.0" X 144.0"	72.0" X 144.0"
DESIGN PRESSURE	+60 / -60	+65 / -65	+55 / -55
GLAZING OPTION	G1, G2, G7	G1, G2, G7	G7

[FL-16925.1](#), [FL-16925.6](#)

Sample Illustrations: Multi Life Fixed Units- TDL Frames

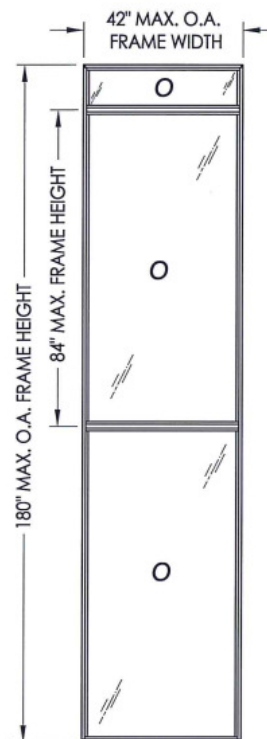


	OUTSIDE GLAZED
MAX FRAME DIMENSIONS	42.0" X 180.0"
MAX C.L. DISTANCE	84"
DESIGN PRESSURE	+65 / -65
GLAZING OPTION	G1, G2, G3

[FL-16925.5](#)

Sample Illustrations: **Multi Life Fixed Units- TDL Frames**


	OUTSIDE GLAZED
MAX FRAME DIMENSIONS	Unlimited" X 96"
MAX C.L. DISTANCE	37.5"
DESIGN PRESSURE	+65 / -65
GLAZING OPTION	G1, G2, G3, G4, G5

[FL-16925.2](#)

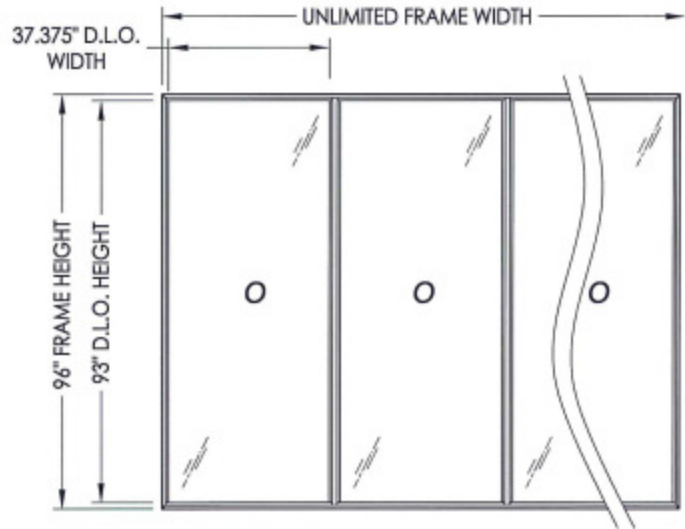


	OUTSIDE GLAZED
MAX FRAME DIMENSIONS	96.0" X 120"
MAX C.L. DISTANCE	37.375"
DESIGN PRESSURE	+65 / -65
GLAZING OPTION	G1, G2, G3, G4, G5


[FL-16925.3](#)

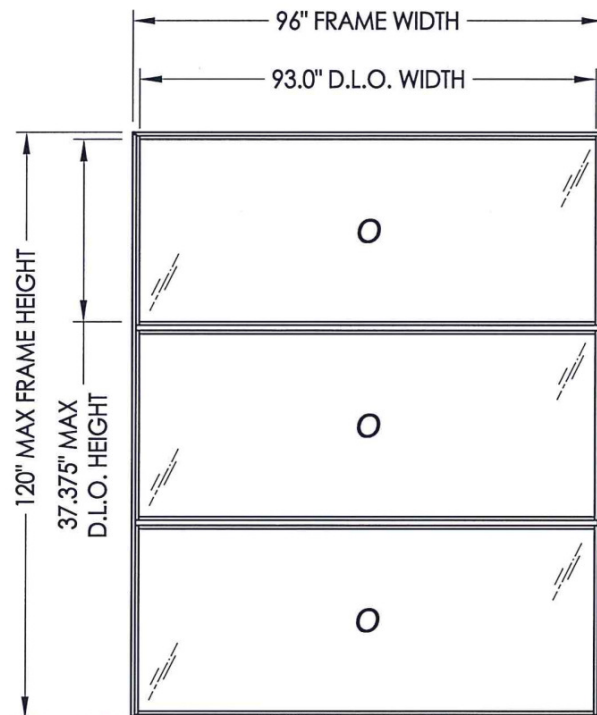

Sample Illustrations: **Multi Life Fixed Units – Intersecting TDL’s (Non Impact)**

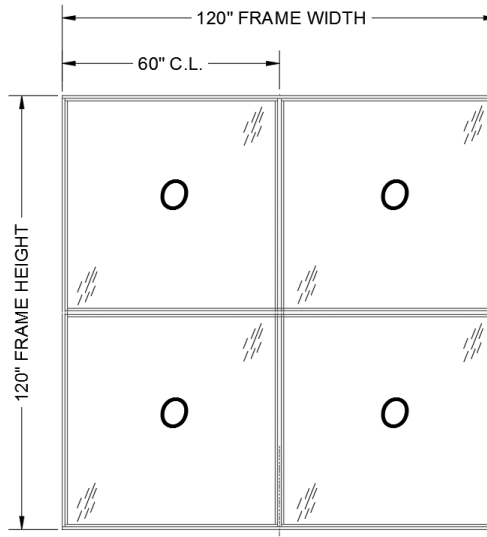

Sample Illustrations: **Multi Life Fixed Units – Jamb Muller Frames**

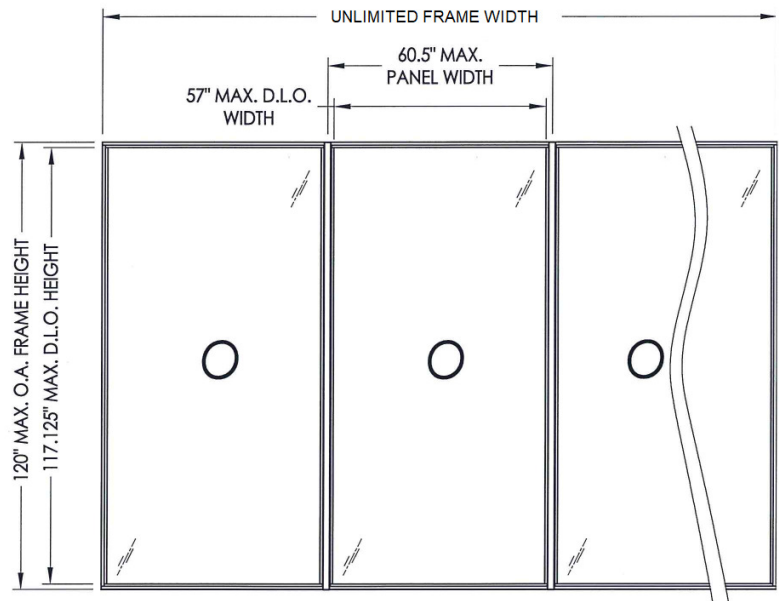

	OUTSIDE GLAZED
MAX FRAME DIMENSIONS	Unlimited" X 120.0"
MAX C.L. DISTANCE	60"
DESIGN PRESSURE	+65 / -65
GLAZING OPTION	G1, G2, G3, G4, G5

[FL-16925.4](#)