


CUSTOMER:

ORDER NO.:


SERIES:

ITEM NO.:

PLAN VIEW
 SERIES 350-T SHOWN

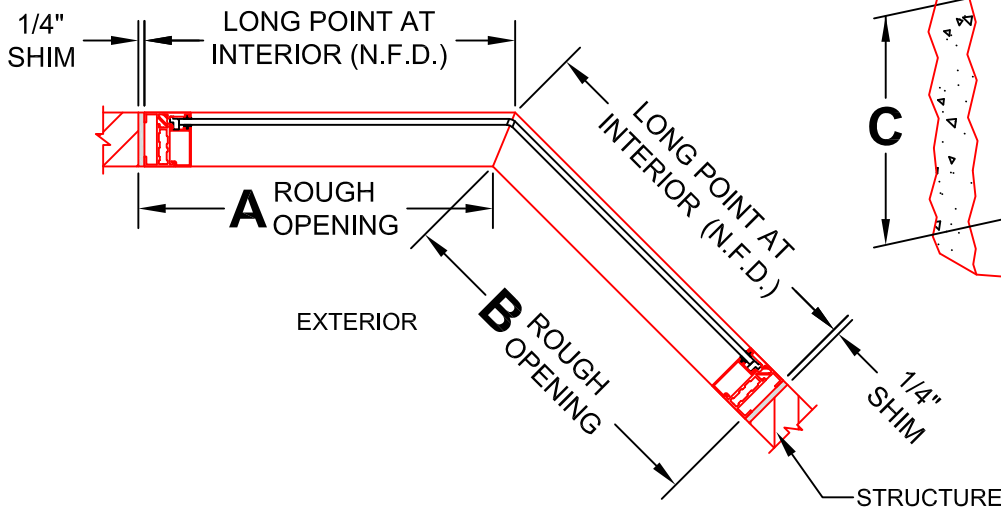

ISOMETRIC VIEW
 135° INSIDE CORNER STRUCTURE

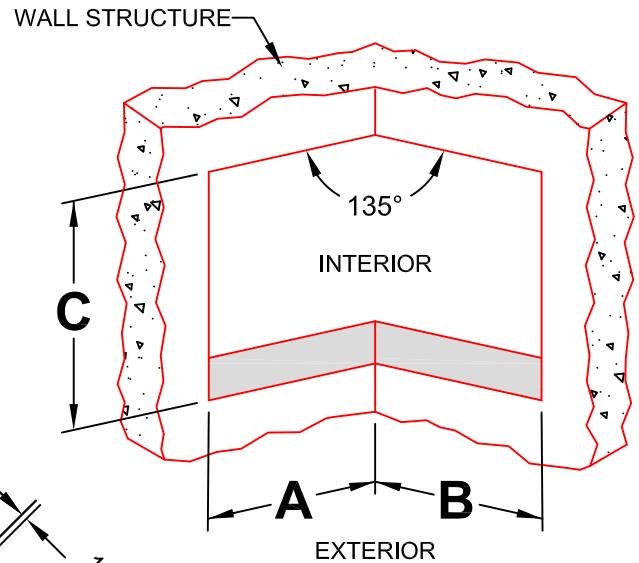
NOTES:

- 1) FRAME TO BE INSTALLED FLUSH TO EXTERIOR LINE.
- 2) †IMPORTANT: 450-T SHIM SPACE VARIES PER WINDOW TYPE - (FIXED OUTSIDE GLAZED = .25"); (FIXED INSIDE GLAZED, P.O. w/BUTT HINGE, AND P.I. = .50"); (P.O. w/4-BAR HINGE = .625"). NOTE: 2X FOR DIM. REF. C

***NOTE: SERIES 450-T FRAME ADD/DEDUCTS
 REQUIRES CUSTOM CALCULATIONS (SEE ENG.)**

**INSTRUCTIONS: ENTER THE (3) RO (ROUGH OPENING) DIMENSIONS IN
 THE TABLE AND CALCULATE REQUIRED N.F.D. BELOW.
 ENTER BUILDING EXTERIOR DIMENSIONS ONLY!**

DIM. REF.	CUSTOMER R.O.	*SERIES ADD (A, B) & SHIM DEDUCT (C)			LONG POINT (INT.) N.F.D.
A		+	*	=	
B		+	*	=	
C		-	.50 [†]	=	

*SERIES ADD (135° ONLY)
 INCLUDES 1/4" SHIM SPACE

SERIES	*SERIES ADD
330-T	1.125
350-T	.6875
450-T [†]	SEE ENG. FOR CALC.
3800-T	1.625
EDGE f	.75 (NO SHELF)

CUSTOMER SIGNATURE:

DATE: